



< [Back to circlesaw machines](#)

KASTOflex U

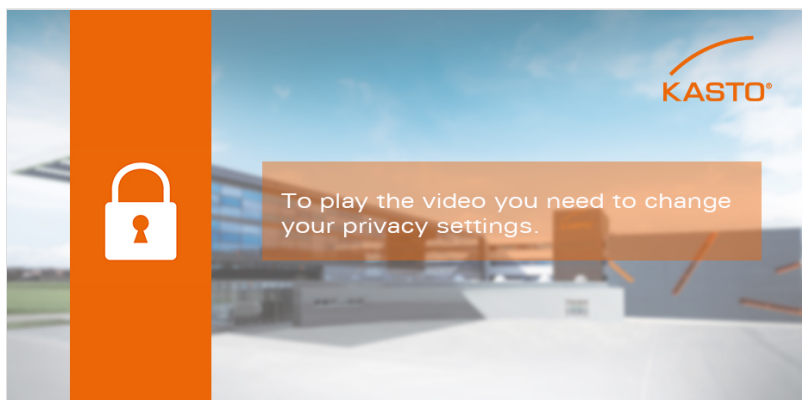

In order to play the video please change your privacy settings.



KASTOflex U

The high performance semi-automatic circular saw KASTOflex U is designed for machine shops and factories alike to cut profiles, tubes and solids.

- Quick work piece clamping via push-button with hydraulic long-/ short stroke vertical clamping vice.
- No saw blade change, no set-up times necessary in mixed profile/solid operation.
- Hydraulic, infinitely variable constant saw feed
- More flexibility with highest efficiency when doing serial cuts



Download brochure (PDF 2.4 MB)

We are happy to help:



Hotline Sales

Vertrieb, Hotline


Phone: +49 7841 61-100

kasto@kasto.com

Make an inquiry



Technical data
KASTOflex U

Cutting range	
Form	
Cutting range 90°	350x25 mm / 140 x 140 mm / Ø 150 mm
Cutting range + 45°	280x30 mm / 120 x 120 mm / Ø 145 mm
Cutting range + 60°	170x50 mm / 110 x 110 mm / Ø 140 mm
Minimum material height with flat material	10 mm
Mass and height	
Length	1.795 mm
Width	1.400 mm
Height	1.900 mm
Total weight	1.350 kg
Material support height	1.050 mm
Performance characteristics	
Connected load	6/8 kW
Pole changing saw drive	1,4/2,2 kW
Frequency regulated drive (option)	4,0 kW
Connected load of coolant pump	0,1 kW
Pole changing cutting speed	12/24 m/min
Cutting speed, infinitely variable (option)	10-60 m/min
Max. clamping power of vertical vice	23.000 N
Saw feed speed range	10-520 mm/min
Rapid return of the saw blade	2.000 mm/min
Diameter of saw blade, special flange: option	Ø350 mm
Diameter of saw blade	Ø400,450 mm

We reserve the right to make technical changes.

Download data sheet

Recommend



Please contact consultant



Services & Support options



Assistance Packages




KASTOretrofit




Repairs



24/7 Hotline

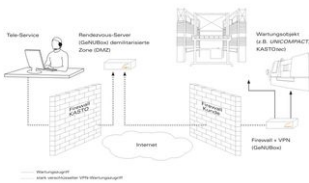

KASTO [RemoteAssistance]

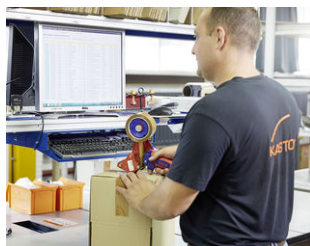

Spare parts



Inspections and maintenance